


# FileMaker® Pro 8.5 Advanced

Database Design Report  
XML Output Grammar

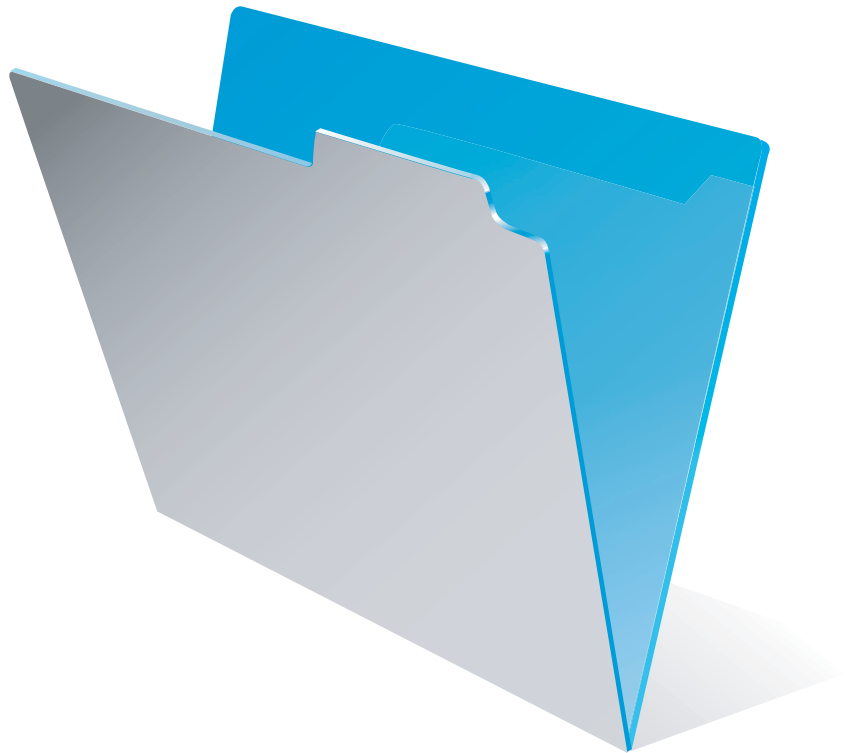

© 2004–2006 FileMaker, Inc. All Rights Reserved.

FileMaker, Inc.  
5201 Patrick Henry Drive  
Santa Clara, California 95054

FileMaker is a trademark of FileMaker, Inc., registered in the U.S. and other countries, and ScriptMaker and the file folder logo are trademarks of FileMaker, Inc.

FileMaker documentation is copyrighted. You are not authorized to make additional copies or distribute this documentation without written permission from FileMaker. You may use this documentation solely with a valid licensed copy of FileMaker software.

All persons and companies listed in the examples are purely fictitious and any resemblance to existing persons and companies is purely coincidental.

Credits are listed in the Acknowledgements document provided with this software.

For more information, visit our web site at [www.filemaker.com](http://www.filemaker.com).

Edition: 01

# Database Design Report XML Output Grammar

This document describes the FileMaker® Pro 8.5 Advanced Database Design Report (DDR) XML output grammar. The DDR XML format is useful for advanced users and developers who want to create tools that analyze or process the structure of databases.

## Table of Contents

<b>Overview (summary) Section</b> .....	3
<b>General Section</b> .....	5
<b>File Reference Section</b> .....	6
<b>BaseTable Section</b> .....	6
<b>Account Section</b> .....	13
<b>PrivilegeSet Section</b> .....	14
<b>ExtendedPrivilege Section</b> .....	18
<b>Relationship Section</b> .....	19
<b>ValueList Section</b> .....	21
<b>Layout Section</b> .....	22
<b>Custom Menu Set Section</b> .....	28
<b>Custom Menu Section</b> .....	28
<b>Custom Function Section</b> .....	31
<b>Script Section</b> .....	31

## Overview (summary) Section

Tag Name	Value	Description
<FMPReport	—	The top most parent node
type="Summary"	Can have one of the following values: <ul style="list-style-type: none"><li>■ Summary</li><li>■ Report</li></ul>	Stores the type of the XML report file. This value is used by the XSL file to determine if we are in summary mode or report mode.
version="8.5v1"	FMPPro Advanced version/vrev	Version/vrev of FileMaker Pro Advanced that generated this report.
creationDate="1/12/2002"	Date string based on the system's locale.	Contains the creation date of the report.
creationTime="2:00 pm">	Time string based on the system's locale.	Contains the creation time of the report.
<FMPReport><File	—	XML node that contains the information about the database file report such as the original filename, the path of the report directory and the XML report filename.
name="testfile.fp7"	Valid filename based on the OS platform.	No validation is performed in the text string content. It is only used for display.
path="C:\test\"	Platform specific file path.	Path of the XML report file of the database file.
link="testfile_fp7.xml">	Valid filename based on the OS platform.	Contains the XML detail report file name.

Tag Name	Value	Description
<FMPReport><File><BaseTables count="2">	Any numeric value.	Shows the number of base tables found in the database referenced under <File name> attribute.
<FMPReport><File><Tables count="2">	Any numeric value.	Shows the number of tables (occurrences) found in the database referenced under <File name> attribute.
<FMPReport><File><Accounts count="2">	Any numeric value.	Shows the number of user accounts found in the database referenced under <File name> attribute.
<FMPReport><File><Privileges count="2">	Any numeric value.	Number of privilege sets found in the database referenced under <File name> attribute.
<FMPReport><File><ExtendedPrivileges count="4">	Any numeric value.	Number of extended privileges found in the database referenced under <File name> attribute.
<FMPReport><File><Layouts count="2">	Any numeric value.	Number of layouts found in the database referenced under <File name> attribute.
<FMPReport><File><Scripts count="2">	Any numeric value.	Number of scripts found in the database referenced under <File name> attribute.
<FMPReport><File><Relationships count="2">	Any numeric value.	Number of relationships found in the database referenced under <File name> attribute.
<FMPReport><File><ValueLists count="2">	Any numeric value.	Number of value lists found in the database referenced under <File name> attribute.
<FMPReport><File><CustomFunctions count="2">	Any numeric value.	Number of custom functions found in the database referenced under <File name> attribute.
<FMPReport><File><FileReferences count="2">	Any numeric value.	Number of file references found in the database referenced under <File name> attribute.
<FMPReport><File><CustomMenuSets count="2">	Any numeric value.	Number of custom menu sets found in the database referenced under <File name> attribute.
<FMPReport><File><CustomMenus count="2">	Any numeric value.	Number of custom menus found in the database referenced under <File name> attribute.

## General Section

Tag Name	Value	Description
<FMPReport	—	The top most parent node.
type="Report"	Can have one of the following values: <ul style="list-style-type: none"> <li>Summary</li> <li>Report</li> </ul>	Stores the type of the XML report file. This value is used by the XSL file to determine if we are in summary mode or report mode.
version="8.5v1"	FMPPro Advanced version/vrev	Version/vrev of FileMaker Pro Advanced that generated this report.
creationDate="1/12/2002"	Date string based on the system's locale	Contains the creation date of the report.
creationTime="2:01 pm"	Time string based on the system's locale.	Contains the creation time of the report.
link="Summary.xml" >	Valid filename based on the OS platform.	Contains the XML summary report file name.
<FMPReport><File	—	XML node that contains the information about the database file report such as the original filename and the path of the report directory.
name="testfile.fp7"	Valid filename based on the OS platform.	No validation is performed in the text string content. It is only used for display.
path="D:\Location" />	Platform specific file path.	Path of the XML report file of the database file.
<FMPReport><File><Options>	—	File specific options of the database file.
<FMPReport><File><Options><OnOpen>	—	Applicable options when the database file is opened.
<FMPReport><File><Options><OnOpen><Account name="PowerUsers">	—	The account used on File Open.
<FMPReport><File><Options><OnOpen><Script name="MyScript" id="123" >	—	This element exists when there is a script specified to be performed on File Open.
<FMPReport><File><Options><OnOpen><Layout name = "MyLayout" id="431" >	—	This element exists when there is a layout specified to be switched to on File Open.
<FMPReport><File><Options><DefaultCustomMenuSet>	—	
<FMPReport><File><Options><DefaultCustomMenuSet><CustomMenuSet name="menu set 1" id="2">	—	This element exists when there is a default custom menu set specified to be switched to.
<FMPReport><File><Options><OnClose>	—	Applicable options when the database file is closed.
<FMPReport><File><Options><OnClose><Script name="MyCloseScript" id="222" >	—	This element exists when there is a script specified to be performed on Close File.

## File Reference Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<FileReferenceCatalog>	—	XML node for the catalog of file references.
<FileReferenceCatalog><FileReference	—	XML node for the file reference.
name="Report"	Any valid file reference name.	—
id = "1"	Internal unique positive integer value indicating creating order.	—
pathList="C:\path\">	Valid path list strings.	Each path is separated by the carriage return character.

## BaseTable Section

Tag Name	Value	Description
<FMPReport><File><BaseTableCatalog>	—	XML node for catalog of (base) table definitions.
<FMPReport><File><BaseTableCatalog><BaseTable	—	XML node for the (base) table definition.
name="Table1"	Any valid table name.	—
id="1"	Internal unique positive integer value indicating creating order.	—
records="12">	Stores the record numbers of a table	—

All nodes below start with <FMPReport><File><BaseTableCatalog><BaseTable>

Tag Name	Value	Description
<FieldCatalog>	—	XML node for catalog of fields.
<FieldCatalog><Field	—	XML node for a field.
name="Field1"	Any valid field name.	—
id="1"	Internal unique positive integer value indicating creating order.	—
fieldType="Normal"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Normal</li> <li>■ Calculated</li> <li>■ Summary</li> </ul>	Indicate the field type.

Tag Name	Value	Description
dataType="Binary" >	Can have one of the following values: <ul style="list-style-type: none"> <li>Text</li> <li>Number</li> <li>Date</li> <li>Time</li> <li>TimeStamp</li> <li>Binary</li> </ul>	Indicates what kind of data is stored in the field.
<FieldCatalog><Field><Calculation	—	XML node for a calculation.
alwaysEvaluate="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if calculation is always evaluated. This attribute is applicable to calculation in field definitions only.
table="Table1">	Valid table name.	Indicates the context table of the calculation. This attribute is applicable to auto-enter calculation only.
<FieldCatalog><Field><Calculation><![CDATA[ F1 ]]>	CDATA containing the calculation text.	—
<FieldCatalog><Field><DisplayCalculation>	—	XML node for a calculation. This XML node is for display purposes only. Basically, it breaks a calculation into sequential chunks.
<FieldCatalog><Field><DisplayCalculation> <Chunk type="FieldRef">	Can have one of the following values: <ul style="list-style-type: none"> <li>FunctionRef</li> <li>FieldRef</li> <li>NoRef</li> <li>CustomFunctionRef</li> </ul>	Chunk type. FunctionRef indicates that the chunk is a calculation function. FieldRef indicates that the chunk is a field. NoRef indicates that the chunk has no special references, but is just ordinary text. CustomFunctionRef indicates that the chunk is a custom function.
<Field	—	XML node for a field.
name = "F1"	Valid field name.	—
id = "2"	Internal unique positive integer value indicating creating order.	—
table = "Customer1"	Table occurrence name.	—
repetition = "2">	If repetition is "1", then it is implicit, no need to output it.	—
<FieldCatalog><Field> <SummaryInfo	—	XML node for field summary.

Tag Name	Value	Description
operation="Total"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Total</li> <li>■ RunningTotal</li> <li>■ Average</li> <li>■ WeightedAverage</li> <li>■ Count</li> <li>■ RunningCount</li> <li>■ Minimum</li> <li>■ Maximum</li> <li>■ StdDeviation</li> <li>■ StdDeviationByPopulation</li> <li>■ Fractional</li> <li>■ FractionalSubtotal</li> </ul>	Summary operation.
summarizeRepetition="Individually"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Together</li> <li>■ Individually</li> </ul>	Summarize repetition property.
restartForEachSortedGroup="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	This attribute is applicable only if the operation is RunningTotal or RunningCount.
<FieldCatalog><Field><SummaryInfo> <SummaryField>	—	XML node representing the field to summarize.
<FieldCatalog><Field><SummaryInfo><SummaryField> <Field	—	XML node for a field.
name="Field2"	Valid field name.	—
id = "2">	Internal unique positive integer value indicating creation order.	—
<FieldCatalog><Field><SummaryInfo><AdditionalField>	—	XML node representing the additional field to summarize.
<FieldCatalog><Field><SummaryInfo><AdditionalField> <Field	—	—
name="Field2"	Valid field name.	—
id = "2"	Internal unique positive integer value indicating creation order.	—
table="Table1"	Table occurrence name.	—
repetition="2" >	If repetition is "1", then it is implicit, no need to output it.	—
<FieldCatalog><Field><Comment>	Any text string.	XML node containing the comment information of a field definition.
<FieldCatalog><Field><AutoEnter	—	XML node representing the auto-enter information of a field.

Tag Name	Value	Description
value="CreationDate"	Can have one of the following values: <ul style="list-style-type: none"> <li>CreationTime</li> <li>CreationDate</li> <li>CreationTimeStamp</li> <li>CreationName</li> <li>CreationAccountName</li> <li>ModificationDate</li> <li>ModificationTime</li> <li>ModificationTimeStamp</li> <li>ModificationName</li> <li>ModificationAccountName</li> <li>PreviousRecord</li> <li>ConstantData</li> </ul>	Auto-enter type
allowEditing="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if user is prohibited from modifying field value during data entry.
calculation="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if the auto-enter calculation is applicable.
lookup="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if the auto-enter lookup information is applicable.
furigana="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if the furigana information is applicable.
alwaysEvaluate="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if calculation is always evaluated. This attribute is applicable to calculation in field definitions only.
constant="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	Attribute indicates if the constant data information is applicable.
<FieldCatalog><Field><AutoEnter><Serial	—	Auto-enter serial information.
generate="OnCommit"	Can have one of the following values: <ul style="list-style-type: none"> <li>OnCommit</li> <li>OnCreation</li> </ul>	Auto-enter serial generate type.
nextValue="1"	A float.	Next value.
increment="2" >	Positive integer value in the range [1, 32767].	Increment value.
<FieldCatalog><Field><AutoEnter><ConstantData>	Any valid text string.	Auto-enter data.
<FieldCatalog><Field><AutoEnter><Calculation	—	XML node for a calculation.

Tag Name	Value	Description
table="Table2">	Valid table name.	Indicates the context table of the calculation. This attribute is applicable to auto-enter calculation only.
<FieldCatalog><Field><AutoEnter><Calculation><![CDATA[field1]]>	CDATA containing the calculation text.	—
<FieldCatalog><Field><AutoEnter><DisplayCalculation>	—	XML node for a calculation. This XMLnode is for display purposes only. Basically, it breaks a calculation into sequential chunks.
<FieldCatalog><Field><AutoEnter><DisplayCalculation><Chunk type="NoRef">	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	Chunk type. FunctionRef indicates that the chunk is a calculation function. FieldRef indicates that the chunk is a field. NoRef indicates that the chunk has no special references, but is just ordinary text. CustomFunctionRef indicates that the chunk is a custom function.
<FieldCatalog><Field><AutoEnter><Lookup>	—	XML node containing the auto-enter lookup information.
<FieldCatalog><Field><AutoEnter><Lookup><Table		Table occurrence XML node. Represents the context table occurrence of the lookup.
name="Table"	Valid table occurrence name.	
id="2">	Internal unique positive integer value indicating creation order.	
<FieldCatalog><Field><AutoEnter><Lookup><Field	—	XML node for a field.
name="Field2"	Valid field name.	—
id = "2"	Internal unique positive integer value indicating creation order.	—
table="Table1"	Table occurrence name.	—
repetition="2" >	If repetition is "1", then it is implicit, no need to output it.	—
<FieldCatalog><Field><AutoEnter><Lookup><NoMatchCopyOption	—	Lookup option.
value="DoNotCopy" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ DoNotCopy</li> <li>■ CopyNextLower</li> <li>■ CopyNextHigher</li> <li>■ CopyConstant</li> </ul>	—
<FieldCatalog><Field><AutoEnter><Lookup><CopyConstantValue>	Any valid text string.	Lookup data information.
<FieldCatalog><Field><AutoEnter><Lookup><CopyEmptyContent	—	Lookup copy empty content option.
state="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—

Tag Name	Value	Description
<FieldCatalog><Field><Validation type = "Always"	type can have the following values: <ul style="list-style-type: none"> <li>■ Always</li> <li>■ OnlyDuringDataEntry</li> </ul>	—
alwaysValidateCalculation = "True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Always validate calculation.
calculation="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the validation calculation is applicable.
valuelist="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the validation value list is applicable.
maxLength="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the validation maximum of character option is applicable.
message="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the validation error message option is applicable.
<FieldCatalog><Field><Validation><StrictDataType value="Numeric">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Numeric</li> <li>■ FourDigitYear</li> <li>■ TimeOfDay</li> </ul>	—
<FieldCatalog><Field><Validation><NotEmpty value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<FieldCatalog><Field><Validation><Unique value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<FieldCatalog><Field><Validation><Existing value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<FieldCatalog><Field><Validation><ValueList	—	—
name="ValueList1"	—	—
id="23" >	—	—
<FieldCatalog><Field><Validation><Range	—	—
from="1"	—	—
to="2" >	—	—

Tag Name	Value	Description
<FieldCatalog><Field><Validation><Calculation><![CDATA[Calc String]]>	—	—
<FieldCatalog><Field><Validation><DisplayCalculation>	—	—
<FieldCatalog><Field><Validation><DisplayCalculation><Chunk type="CustomFunctionRef">Custom Function Name</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
<FieldCatalog><Field><Validation><MaxDataLength value="1">	—	—
<FieldCatalog><Field><Validation><StrictValidation value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<FieldCatalog><Field><Validation><ErrorMessage>	—	—
<FieldCatalog><Field><Storage	—	—
repetitions="2"	—	—
global="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
storeCalculationResults="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Attribute applies only to field calculation types.
index="None"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ None</li> <li>■ Minimal</li> <li>■ All</li> </ul>	—
autoIndex="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
indexLanguage="Dutch">	indexLanguage value can be one of the languages listed in the Options for Field dialog box (Storage tab).	—

Tag Name	Value	Description
<FieldCatalog><Field><Furigana	—	<Furigana> element will exist when "Use Furigana Field" checkbox is checked in the UI.
inputMode="AsEntered" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ AsEntered</li> <li>■ Hiragana</li> <li>■ 2ByteKatakana</li> <li>■ 2ByteRoman</li> <li>■ 1ByteKatakana</li> <li>■ 1ByteRoman</li> </ul>	—
<FieldCatalog><Field><Furigana><Field name="field" id="2">	—	Field node with all its attributes

## Account Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<AccountCatalog>	—	—
<AccountCatalog><Account	—	—
name="Sales"	—	—
id="1"	—	—
status="Active"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Active</li> <li>■ Inactive</li> </ul>	—
changePasswordOnNextLogin="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
managedBy = "FileMaker"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ FileMaker</li> <li>■ External</li> </ul>	—
emptyPassword="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the account uses an empty password.
privilegeSet ="Set1" >	—	Indicates the privilege set assigned to this account.
<AccountCatalog><Account><Description>	—	—

## PrivilegeSet Section

All nodes below start with <FMPReport><File><PrivilegeCatalog>

Tag Name	Value	Description
<PrivilegeSet	—	—
name="GuestUsers"	—	—
id="1"	—	—
printing="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
exporting="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
managedExtended="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
overrideValidationWarning="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
idleDisconnect="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
menu="All"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ All</li> <li>■ EditOnly</li> <li>■ Minimal</li> </ul>	—
allowModifyPassword="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
passwordExpiry="90"	—	Number of days before the password expires
passwordMinLength="8"	—	—
comment="Some description text">	—	—
<PrivilegeSet><Records	—	—
value="ViewOnly"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ ViewOnly</li> <li>■ CreateEdit</li> <li>■ CreateEditDelete</li> <li>■ NoAccess</li> <li>■ Custom</li> </ul>	—

Tag Name	Value	Description
<PrivilegeSet><Records><TableList>	—	TableList node will only exist, if <Records value> is "Custom"
<PrivilegeSet><Records><TableList><BaseTable	—	—
name="addressbook"	—	If name attribute is "[Any New Table]", then this node will refer to all newly created tables.
id="123" >	—	—
<PrivilegeSet><Records><TableList><Table><View value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> <li>■ Limited</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><View><Calculation><![CDATA[Calc String]]>	—	This node will only exist if <View value> is "Limited"
<PrivilegeSet><Records><TableList><Table><View><DisplayCalculation>	—	This node will only exist if <View value> is "Limited"
<PrivilegeSet><Records><TableList><Table><View><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><Edit value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> <li>■ Limited</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><Edit><Calculation><![CDATA[Calc String]]>	—	This node will only exist if <Edit value> is "Limited"
<PrivilegeSet><Records><TableList><Table><Edit><DisplayCalculation>	—	This node will only exist if <Edit value> is "Limited"
<PrivilegeSet><Records><TableList><Table><Edit><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><Create value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><Delete value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> <li>■ Limited</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><Delete><Calculation>	—	This node will only exist if <Delete value> is "Limited"

Tag Name	Value	Description
<PrivilegeSet><Records><TableList><Table><Delete><DisplayCalculation>	—	This node will only exist if <Delete value> is "Limited"
<PrivilegeSet><Records><TableList><Table><Delete><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><FieldAccess	—	—
value="Limited">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ All</li> <li>■ Limited</li> <li>■ No Access</li> </ul>	—
<PrivilegeSet><Records><TableList><Table><FieldAccess><FieldList>	—	This node will only exist if <FieldAccess value> is "Limited"
<PrivilegeSet><Records><TableList><Table><FieldAccess><FieldList><Field	—	—
name="f2" id="2"	—	—
accessRestriction="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Modifiable</li> <li>■ ViewOnly</li> <li>■ NoAccess</li> </ul>	—
<PrivilegeSet><Layouts	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
value="Custom">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Modifiable</li> <li>■ ViewOnly</li> <li>■ Custom</li> </ul>	LayoutList node will only exist, if <Layouts value> is "Custom"
<PrivilegeSet><Layouts><LayoutList>	—	—
<PrivilegeSet><Layouts><LayoutList><Layout	—	—
name="MainLayout"	—	If name attribute is ["Any New Layout"], then this node will refer to all newly created Layouts.
id="221">	—	—
<PrivilegeSet><Layouts><LayoutList><Layout><LayoutAccess	—	—

Tag Name	Value	Description
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> <li>Modifiable</li> <li>ViewOnly</li> <li>NoAccess</li> </ul>	—
<PrivilegeSet><Layouts><LayoutList><Layout><DataAccess	—	—
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> <li>Modifiable</li> <li>ViewOnly</li> <li>NoAccess</li> </ul>	—
<PrivilegeSet><ValueLists	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	—
value="Custom" >	Can have one of the following values: <ul style="list-style-type: none"> <li>Modifiable</li> <li>ViewOnly</li> <li>Custom</li> </ul>	ValueListList node will only exist, if <ValueLists value> is "Custom"
<PrivilegeSet><ValueLists><ValueListList>	—	—
<PrivilegeSet><ValueLists><ValueListList><ValueList	—	—
name="Addresses"	—	If name attribute is "[Any New Value List]", then this node will refer to all newly created ValueLists.
id="23" >	—	—
<PrivilegeSet><ValueLists><ValueListList><ValueList><Access	—	—
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> <li>Modifiable</li> <li>ViewOnly</li> <li>NoAccess</li> </ul>	—
<PrivilegeSet><Scripts	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>True</li> <li>False</li> </ul>	—
value="Custom" >	Can have one of the following values: <ul style="list-style-type: none"> <li>Modifiable</li> <li>ExecutableOnly</li> <li>NoAccess</li> </ul>	ScriptList node will only exist, if <Scripts value> is "Custom"
<PrivilegeSet><Scripts><ScriptList>	—	—

Tag Name	Value	Description
<PrivilegeSet><Scripts><ScriptList><Script	—	—
name="MainScript"	—	If name attribute is "[Any New Script]", then this node will refer to all newly created Scripts.
id="221"	—	—
runFullAccess="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<PrivilegeSet><Scripts><ScriptList><Script><Access	—	—
value="Modifiable" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Modifiable</li> <li>■ ExecutableOnly</li> <li>■ NoAccess</li> </ul>	—

## ExtendedPrivilege Section

All nodes below start with <FMPReport><File><ExtendedPrivilegeCatalog>

Tag Name	Value	Description
<ExtendedPrivilege	—	—
name = "fmxml"	—	—
id="1"	—	—
comment = "place comment here" >	—	—
<ExtendedPrivilege><PrivilegeSetList>	—	<PrivilegeSetList> node exists when the current extended privilege is used by other privilege sets.
<ExtendedPrivilege><PrivilegeSetList><PrivilegeSet	—	—
name = "Guest"	—	<PrivilegeSet name> contains a valid privilege set for the current file.
id="123" >	—	—

## Relationship Section

All nodes below start with <FMPReport><File><RelationshipGraph>

Tag Name	Value	Description
<RelationshipList>	—	—
<RelationshipList><Relationship	—	—
id = "1">	—	—
<RelationshipList><Relationship><LeftTable	—	—
name="Table1"	—	—
cascadeDelete="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
cascadeCreate="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<RelationshipList><Relationship><LeftTable><SortList value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Specify if the sort information is applicable or not.
<RelationshipList><Relationship><LeftTable><SortList><Sort type="Descending">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Ascending</li> <li>■ Descending</li> <li>■ Custom</li> </ul>	—
<RelationshipList><Relationship><LeftTable><SortList><Sort><PrimaryField>	Child node is a field element.	—
<RelationshipList><Relationship><LeftTable><SortList><Sort><SummaryField>	Child node is a field element. Optional	—
<RelationshipList><Relationship><LeftTable><SortList><Sort><OverrideLanguage language="Japanese"/>	optional	—
<RelationshipList><Relationship><LeftTable><SortList><Sort><ValueList name="New Value List" id="23"/>	optional	—
<RelationshipList><Relationship><RightTable	—	—
name="Table2"	—	—
cascadeDelete="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—

Tag Name	Value	Description
<code>cascadeCreate="True" &gt;</code>	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList value="True"&gt;</code>	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList &lt;Sort type="Descending"&gt;</code>	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Ascending</li> <li>■ Descending</li> <li>■ Custom</li> </ul>	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList &lt;Sort&gt;&lt;PrimaryField&gt;</code>	Child node is a field element.	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList &lt;Sort&gt;&lt;SummaryField&gt;</code>	Child node is a field element.	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList &lt;Sort&gt;&lt;OverrideLanguage language="Japanese"/&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;RightTable&gt;&lt;SortList &lt;Sort&gt;&lt;ValueList name="New Value List" id="23"/&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateList&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateCatalog&gt; &lt;JoinPredicate type="LessThan" &gt;</code>	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Equal</li> <li>■ Integral</li> <li>■ LessThan</li> <li>■ LessThanOrEqualTo</li> <li>■ GreaterThan</li> <li>■ GreaterThanOrEqualTo</li> <li>■ CartesianProduct</li> </ul>	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateCatalog&gt; &lt;JoinPredicate&gt;&lt;LeftField&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateCatalog&gt; &lt;JoinPredicate&gt;&lt;LeftField&gt;&lt;Field</code>	—	—
<code>table="Table1"</code>	—	—
<code>id="2"</code>	—	—
<code>name="Field1"&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateCatalog&gt; &lt;JoinPredicate&gt;&lt;RightField&gt;</code>	—	—
<code>&lt;RelationshipList&gt;&lt;Relationship&gt;&lt;JoinPredicateCatalog&gt; &lt;JoinPredicate&gt;&lt;RightField&gt;&lt;Field</code>	—	—
<code>table="Table2"</code>	—	—

Tag Name	Value	Description
id="2"	—	—
name="Field2">	—	—
<TableList>	—	—
<TableList><Table	—	—
name="T"	—	—
color = "#ffffff"	—	—
id="1"	—	—
baseTable = "TName"	—	—
baseTableId = "32345">	—	—
<TableList><Table><FileReference	—	—
name="file reference name"	—	—
id="1" >	—	—

## ValueList Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<ValueListCatalog>	Empty	—
<ValueListCatalog><ValueList	Empty	—
name="ValueList1"	Any value	—
id="1">	—	—
<ValueListCatalog><ValueList><Source value="Custom">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Custom</li> <li>■ Field</li> <li>■ External</li> </ul>	<CustomValues/PrimaryField/External> node will only exist if <Source value> is "Custom"/"Field"/"External". <SecondaryField> node will only exist if "also display" checked in the UI
<ValueListCatalog><ValueList><CustomValues>	—	—
<ValueListCatalog><ValueList><CustomValues><Text>	—	—
<ValueListCatalog><ValueList><PrimaryField	—	—
sort = "True" show = "True" resortLanguage = "Finnish" >	sort can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> show can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	The sort attribute indicates that the field contents are sorted. The show attribute indicates that the field contents are included in the value list. The resortLanguage indicates the language re-sort is based on.
<ValueListCatalog><ValueList><PrimaryField><Field	—	—
table="Table1"	—	—

Tag Name	Value	Description
id="2"	—	—
name="Field1" >	—	—
<ValueListCatalog><ValueList><SecondaryField	—	—
sort = "False" show = "False"> resortLanguage = "Finnish" >	sort can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> show can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	The sort attribute indicates that the field contents are sorted. The show attribute indicates that the field contents are included in the value list. The resortLanguage indicates the language re-sort is based on.
<ValueListCatalog><ValueList><SecondaryField><Field	—	—
table="Table2"	—	—
id="2"	—	—
name="Field2" >	—	—
<ValueListCatalog><ValueList><ShowRelated value="True">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<ValueListCatalog><ValueList><ShowRelated><Table name="Table" id="1"/>	—	—
<ValueListCatalog><ValueList><External>	—	—
<ValueListCatalog><ValueList><External><FileReference	—	—
name="FileReferenceName"	—	—
id="123" >	—	—
<ValueListCatalog><ValueList><External><ValueList	—	—
name="ValueList1" id="24">	—	—

## Layout Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<LayoutCatalog>	—	—
<LayoutCatalog><Layout	—	—
name="layout#1"	—	—
id="234"	—	—
includeInMenu="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Property to determine if the layout is included in the menu.

Tag Name	Value	Description
<LayoutCatalog><Layout><Table	—	—
name="table"	—	—
id="1">	—	—
<LayoutCatalog><Layout><CustomMenuSet	—	—
name="Custom menu set"	—	—
id="1">	—	—
<LayoutCatalog><Layout><Options saveRecord="True" showFieldFrames="True">	—	—
<LayoutCatalog><Layout><Object	—	—
name="FieldObj1"	A valid layout object name string	—
type="Field">	Can have one of the following values: <ul style="list-style-type: none"> <li>■ Field</li> <li>■ GroupButton</li> <li>■ Line</li> <li>■ Rect</li> <li>■ RRect</li> <li>■ Oval</li> <li>■ Text</li> <li>■ Portal</li> <li>■ ExternalObject</li> <li>■ TabControl</li> </ul>	—
<LayoutCatalog><Layout><Object><ToolTip> <Calculation> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>		
<LayoutCatalog><Layout><Object><FieldObj	—	—
numOfReps="—3"	—	Negative is used to denote horizontal display. Positive is used for vertical display. The absolute value shown is for the number of repetitions including the starting repetition.

Tag Name	Value	Description
flags="2080"	Integer value containing bit flag information	<p>Possible bit flag values are:</p> <ul style="list-style-type: none"> <li>■ Add "Other" item to control set fields = 0x0001</li> <li>■ Automatically select all when entering field = 0x0002</li> <li>■ Do not allow entry into field in Browse mode = 0x0004</li> <li>■ Add "Edit" item to edit value list = 0x0008</li> <li>■ Do no allow entry into field in Find mode = 0x0010</li> <li>■ Exit field on TAB key = 0x0020</li> <li>■ Exit field on RETURN key = 0x0040</li> <li>■ Exit field on ENTER key = 0x0080</li> <li>■ Include vertical scroll bar = 0x0100</li> <li>■ Include horizontal scroll bar = 0x0200</li> <li>■ Include drop-down/pop-up icon = 0x0400</li> <li>■ Auto-complete using specified value list or field's values = 0x0800</li> </ul>
inputMode="0"	Values can be: 128 - 135	<p>Meaning of the numbers:</p> <p>128: Synch Field Font            129: Japanese Active            130: Japanese Direct            131: Hiragana            132: Full-Width Katakana            133: Full-Width Alpha            134: Half-Width Katakana            135: Half-Width Alpha</p>
displayType="0" >	Values can be: 0 to 6	<p>Meaning of the numbers:</p> <p>0: Edit Box            1: Drop-down List            2: Pop-up Menu            3: Checkbox Set            4: Radio Button Set            6: Calendar popup</p>
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo>	—	—
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo><Field	—	—
name="Field1"	—	—
id="2"	—	—
table="Table1"	—	—
repetition="2"	—	—
maxRepetition="5"	—	This is the field's storage repetition number, listed here again for external fields where it might not be possible to reference the field's definition.
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo><ValueList	—	—

Tag Name	Value	Description
name="Cities" id="23">	—	—
<LayoutCatalog><Layout><Object><GroupButtonObj>	—	Can have other child Object nodes.
<LayoutCatalog><Layout><Object><GroupButtonObj> <Step>	—	Step node and all its children can contain script steps as covered under the <a href="#">Script Section</a> .
<LayoutCatalog><Layout><Object><TextObj>	—	—
<LayoutCatalog><Layout><Object><TextObj><FieldList>	—	—
<LayoutCatalog><Layout><Object><TextObj><FieldList> <Field name="field" id="2" table="table" repetition="2"/>	—	—
<LayoutCatalog><Layout><Object><PortalObj	—	—
portalFlags="1"	—	Possible flag values and their meanings are: <ul style="list-style-type: none"> <li>■ Show scroll bar on portal = 0x0001</li> <li>■ Has alternating row background fill = 0x0002</li> <li>■ Allow deletion of rows = 0x0004</li> <li>■ Rows should be sorted (according to associated sort spec) = 0x0008</li> <li>■ Retain scroll bar position after active exit = 0x0010</li> </ul>
numOfRows="2"	—	Number of rows shown on the portal.
initialRow="1">	—	Initial row number.
<LayoutCatalog><Layout><Object><PortalObj> <TableAliasKey>	—	Name of table occurrence of the portal object.
<LayoutCatalog><Layout><Object><PortalObj><FieldList>	—	—
<LayoutCatalog><Layout><Object><PortalObj><FieldList> <Field	—	—
name="Table"	—	—
id="2"	—	—
table="Table1">	—	—

Tag Name	Value	Description
<pre>&lt;LayoutCatalog&gt;&lt;Layout&gt;&lt;Object&gt;&lt;PortalObj&gt; &lt;SortList value="True"&gt;   &lt;Sort type="Descending"&gt;     &lt;PrimaryField&gt;       &lt;Field name="f1" id="2" table="test123"/&gt;     &lt;/PrimaryField&gt;   &lt;/Sort&gt;   &lt;Sort type="Ascending"&gt;     &lt;PrimaryField&gt;       &lt;Field name="f4" id="2" table="test123"/&gt;     &lt;/PrimaryField&gt;     &lt;SummaryField&gt;       &lt;Field name="summary" id="2" table="test123"/&gt;     &lt;/SummaryField&gt;     &lt;OverrideLanguage language="Japanese"/&gt;   &lt;/Sort&gt;   &lt;Sort type="Custom"&gt;     &lt;PrimaryField&gt;       &lt;Field name="f5" id="2" table="test123"/&gt;     &lt;/PrimaryField&gt;     &lt;ValueList name="New Value List" id="2"/&gt;   &lt;/Sort&gt; &lt;/SortList&gt;</pre>	—	—
<pre>&lt;LayoutCatalog&gt;&lt;Layout&gt;&lt;ObjectStyle&gt;&lt;ParagraphStyle&gt; &lt;Justification&gt;</pre>	<p>Can have the following values:</p> <ul style="list-style-type: none"> <li>■ 2 - Centre</li> <li>■ 3 - Right</li> <li>■ 4 - Full</li> </ul> <p>Otherwise Left</p>	Specify the justification of the tab control object.
<pre>&lt;LayoutCatalog&gt;&lt;Layout&gt;&lt;Object&gt;&lt;TabControlObj&gt;</pre>	—	—
<pre>  tabFlagSet="4"</pre>	—	—
<pre>  visPanelIndex="1"&gt;</pre>	—	—
<pre>&lt;LayoutCatalog&gt;&lt;Layout&gt;&lt;Object&gt;&lt;TabControlObj&gt; &lt;TabPanelObj</pre>	—	—

Tag Name	Value	Description
textFlagSet="1">	—	Bit flags indicating the following properties: <ul style="list-style-type: none"> <li>■ Left and right bounds should not grow or shrink = 0x0002</li> <li>■ Contains at least one variable (merge field) = 0x0008</li> <li>■ Has rounded corners =0x0010</li> <li>■ Pre-5.0 buttons (i.e.text obj with old effects). = 0x0040</li> </ul>
<LayoutCatalog><Layout><Object><ExternalObj typeID="WEBV" typeIndex="0" externalFlagSet="1">	—	<ul style="list-style-type: none"> <li>■ typeID is a quadchar string that identifies the layout object</li> <li>■ typeIndex and internal value that selects one of several available object types associated with typeID</li> <li>■ externalFlagSet is a bit flag value to indicate the following properties:                             <ul style="list-style-type: none"> <li>▶ Object can be activated = 0x0001</li> <li>▶ Object can display content in Find Mode = 0x0002</li> <li>▶ The user explicitly chose a custom calc = 0x8000</li> </ul> </li> </ul>
<LayoutCatalog><Layout><Object><ExternalObj > <Calculation index="0"> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation index="1"> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	ExternalObj can have more than one calculation. The index attribute value will distinguish what each calculation is.

## Custom Menu Set Section

Tag Name	Value	Description
<CustomMenuSetCatalog>	—	—
<CustomMenuCatalog><CustomMenuSet	—	Custom menu set XML element.
name="Menu Set 1"	—	Unique name for the menu set.
id="1">	—	Identifier indicating creation order.
<CustomMenuSetCatalog<CustomMenuSet> <CustomMenuList>	—	—
<CustomMenuSetCatalog<CustomMenuSet> <CustomMenuList><CustomMenu	—	—
name="Custom menu"	—	—
id="1">	—	—
<CustomMenuSetCatalog<CustomMenuSet><Comment>	—	—

## Custom Menu Section

Tag Name	Value	Description
<CustomMenuCatalog>	—	—
<CustomMenuCatalog><CustomMenu	—	Custom menu XML element.
name="Menu Name"	—	Unique name for the menu.
id="1">	—	Identifier indicating creation order.
<CustomMenuCatalog<CustomMenu><BaseMenu	—	—
name="Menu Name"	—	—
value="1">	—	—
<CustomMenuCatalog<CustomMenu><Options	—	—
findMode="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu is applicable in Find mode.
browseMode="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu is applicable in Browse mode.
previewMode="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu is applicable in Preview mode.
macPlatform="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu is applicable for the Mac platform.

Tag Name	Value	Description
winPlatform="False"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu is applicable for the Windows platform.
overrideName="False">	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the custom menu's name property is overridden.
<CustomMenuCatalog<CustomMenu><Title>		XML node containing the Title calculation of a custom menu.
<CustomMenuCatalog<CustomMenu><Title><Calculation>	—	—
<CustomMenuCatalog<CustomMenu><Title><DisplayCalculation>	—	—
<CustomMenuCatalog<CustomMenu><Comment>	—	XML node containing the comment of a custom menu.
<CustomMenuCatalog><CustomMenu><MenuItemList>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem>	—	—
macPlatform="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem is applicable to the Mac platform.
winPlatform="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem is applicable to the Mac platform.
overrideName="False"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem's name property is overridden.
isSubMenuItem="True"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem is a sub-menu.
specifyScript="False"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem uses a script to specify an action.
overrideAction="False"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem's action is overridden. It's just a flag to indicate if the internal script step of the menu item is applicable or not. <b>Note</b> This is different then the enable attribute of a script step which indicates if the step is enabled/disabled. For custom menu, the script step is always enabled.

Tag Name	Value	Description
isSeparatorItem="False"	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem is a separator.
overrideShortcut="False">	Can have the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	Indicates if the MenuItem's shortcut should be overridden.
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><CustomMenu	—	CustomMenu XML node. This XML node exists if the MenuItem is a sub-menu.
name="CustomMenu"	—	—
id="1">	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><Command	—	XML node indicating the FileMaker's menu's command id and string if the MenuItem is based on an existing menu command.
name="File Open"	—	—
id="1234">	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><Name>	—	Exists if overrideName is True.
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><Name><Calculation>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><Name><DisplayCalculation>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem><Shortcut	—	—
modifier="1"	—	Flags indicating the modifier keys.
key="78">	—	Unicode value of the shortcut key. Special keys are mapped to the User Private Space of 0xe000+ range.
<CustomMenuCatalog><Menu><MenuItemList><MenuItem><Step>	—	The action of the menu item. This Step node is always reported. The overrideAction attribute will determine if this node is applicable or not.

## Custom Function Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<CustomFunctionCatalog>	—	—
<CustomFunctionCatalog><CustomFunction	—	—
name="SalesTax"	—	—
id="1"	—	—
parameters="p1;p2;p3"	—	—
visible="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	If True, the custom function will then be listed in the Calculation Dialog under the function list.
<CustomFunctionCatalog><CustomFunction><DisplayCalculation>	—	—
<CustomFunctionCatalog><CustomFunction><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
<CustomFunctionCatalog><CustomFunction><Calculation>	—	This is the body of the custom function which is a calculation.

## Script Section

Tag Name	Value	Description
<ScriptCatalog>	—	—
<ScriptCatalog><Script	—	—
name="MainScript"	—	—
id="122"	—	—
runFullAccess="True"	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
includeInMenu="True" >	Can have one of the following values: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
<ScriptCatalog><StepList>	—	—

Individual Steps are listed under <StepList>. The following table shows the XML grammar per script step. This table is exported from "CalcScriptingDocs" database.

### Notes:

- Many script steps below have options/attributes which are only applicable if certain other options/attributes are enabled or set to a certain value. Examples of this are:
  - find requests for the 'Perform Find' script step (only applicable if 'Specify find requests' checkbox is checked)
  - file, calculation, or text for the 'Send Event' script step (only applicable if radio button is set to file, calculation or text respectively)

For the sake of discussion, let us call the former 'conditional' options/attributes and the latter 'enabling/determining' options/attributes. Though only applicable when the corresponding 'enabling/determining' option/attribute is appropriately set, once specified, 'conditional' options/attributes may very well be retained even after the 'enabling/determining' option/attribute is changed in such a way that the 'conditional' option/attributes are no longer applicable. This is done for the sake of convenience so that if/when the user ever changes their mind and switches the 'enabling/determining' option/attribute back, so that the 'conditional' options/attributes are once again applicable, the last entered/chosen values for these 'conditional' options/attributes will still be present.

For example, in the case of a 'Perform Find' script step, previously specified find requests will be retained, even though the user may uncheck the 'Specify find requests' checkbox, so that, in case they decide to re-enable it, the last entered find will still be present, for the sake of convenience. Similarly, in the case of the 'Send Event' script step, a previously specified calculation will be retained, even though the user may switch to specifying a file, so that, in case they decide to switch back to a calculation, the last entered calculation will still be present, again for the sake of convenience.

As the last entered/chosen values of such currently inapplicable 'conditional' options/attributes are actually stored in the script step itself, corresponding XML for them is therefore generated when a DDR is performed. The fact that such options/attributes are reported should not therefore be construed as somehow implying they are applicable. Their applicability can/should be determined by checking the XML setting reported by the DDR for the corresponding 'enabling/determining' option/attribute.

- All script steps below contain the element <StepText> and many contain instances of the element <DisplayCalculation>. Both of these elements contain redundant information that only serves to make DDR reports (in particular, HTML ones) more readable.

Area	Name	XML Grammar	XML Values	XML Description
Control	Perform Script [file name, script]	<pre>&lt;Step name="Perform Script" id="1" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;CurrentScript value="Halt"/&gt; &lt;FileReference name={name} id="1"&gt; &lt;UniversalPathList&gt; {PathList}&lt;/UniversalPathList&gt; &lt;/FileReference&gt; &lt;Script name="EndOfYear" id="1"/&gt; &lt;/Step&gt;</pre>	<p>&lt;CurrentScript value&gt; when specified for a button can be:</p> <ul style="list-style-type: none"> <li>Halt</li> <li>Exit</li> <li>Pause</li> <li>Resume</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>NoRef</li> <li>FunctionRef</li> <li>FieldRef</li> <li>CustomFunctionRef</li> </ul>	<p>&lt;FileReference&gt; is only required for external scripts.</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>

Area	Name	XML Grammar	XML Values	XML Description
Control	Pause/Resume Script	<pre>&lt;Step name="Pause/Resume Script" id="62" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;PauseTime value="Indefinitely"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[120]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;PauseTime value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Indefinitely</li> <li>■ ForDuration</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<Calculation> node exists when <PauseTime value> is "ForDuration".
Control	Exit Script	<pre>&lt;Step id="103" name="Exit Script" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	—	—
Control	Halt Script	<pre>&lt;Step id="90" name="Halt Script" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Control	If	<pre>&lt;Step name="If" id="68" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Control	Else	<pre>&lt;Step id="69" name="Else" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Control	End If	<pre>&lt;Step id="70" name="End If" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Control	Loop	<pre>&lt;Step id="71" name="Loop" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Control	Exit Loop If	<pre>&lt;Step id="72" name="Exit Loop If" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Control	End Loop	<Step id="73" name="End Loop" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Control	Allow User Abort	<Step id="85" name="Allow User Abort" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step>	<Set state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Control	Set Error Capture	<Step id="86" name="Set Error Capture" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step>	<Set state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Navigation	Go to Layout	<Step id="6" name="Go to Layout" enable="True"> <StepText>Script step text</StepText> <LayoutDestination value="SelectedLayout"/> <Layout name="LayoutName" id="1"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[Calc.String]]> </Calculation> </Layout> </Step>	<LayoutDestination value> can be: <ul style="list-style-type: none"> <li>■ OriginalLayout</li> <li>■ LayoutNameByCalc</li> <li>■ LayoutNumberByCalc</li> <li>■ SelectedLayout</li> </ul> <Chunk type> can be: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<Layout> element is only output if <LayoutLocation value> is not "OriginalLayout" <Calculation> element is only output if <LayoutDestination value> is "LayoutNameByCalc" or "LayoutNumberByCalc". <Layout id> is required in case there is more than one layout with the same name.
Navigation	Go to Record/Request/Page	<Step id="16" name="Go to Record/Request/Page" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Exit state="False"/> <RowPageLocation value="ByCalculation"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[Calc.String]]> </Calculation> </Step>	<NoInteract state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <Exit state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <RowPageLocation value> can be: <ul style="list-style-type: none"> <li>■ First</li> <li>■ Last</li> <li>■ Previous</li> <li>■ Next</li> <li>■ ByCalculation</li> </ul> <Chunk type> can be: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<NoInteract> and <Calculation> nodes are present when <RowPageLocation value> attribute is "ByCalculation". <Exit> element is only present when <RowPageLocation value> is "Next" or "Previous". <Exit state> indicates whether script execution should be terminated if there is no next/previous record/request/page (i.e. if the current record/request/page is the last/first one).

Area	Name	XML Grammar	XML Values	XML Description
Navigation	Go to Related Record	<pre> &lt;Step id="74" name="Go to Related Record" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Option state="true"/&gt;   &lt;ShowInNewWindow state="true"/&gt;   &lt;Restore state="true"/&gt;   &lt;MatchAllRecords state="true"/&gt;   &lt;Table name={TableName} id={id value}/&gt;   &lt;LayoutDestination value="SelectedLayout"/&gt;   &lt;Layout name={LayoutName} id={id value}/&gt;   &lt;Name&gt;     &lt;Calculation&gt;&lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;/Name&gt;   &lt;Height&gt;     &lt;Calculation&gt;&lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;/Height&gt;   &lt;Width&gt;     &lt;Calculation&gt;&lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;/Width&gt;   &lt;DistanceFromTop&gt;     &lt;Calculation&gt;&lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;/DistanceFromTop&gt;   &lt;DistanceFromLeft&gt;     &lt;Calculation&gt;&lt;![CDATA[1221]]&gt;&lt;/Calculation&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;/DistanceFromLeft&gt; &lt;/Step&gt; </pre>	<p>&lt;Option state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;ShowInNewWindow state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Restore state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;MatchAllRecords state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;LayoutDestination value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ CurrentLayout</li> <li>■ LayoutNameByCalc</li> <li>■ LayoutNumberByCalc</li> <li>■ SelectedLayout</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>&lt;Option&gt; is used to denote state of "Use external table's layout" checkbox.</p> <p>&lt;Restore&gt; element is used to denote state of "Show all related records in new found set" checkbox.</p> <p>&lt;Layout&gt; element is only output if &lt;LayoutLocation value&gt; is not "CurrentLayout".</p> <p>&lt;Calculation&gt; element is only output if &lt;LayoutDestination value&gt; is "LayoutNameByCalc" or "LayoutNumberByCalc."</p>

Area	Name	XML Grammar	XML Values	XML Description
Navigation	Go to Portal Row	<pre>&lt;Step id="99" name="Go to Portal Row" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;SelectAll state="False"/&gt;   &lt;Exit state="False"/&gt;   &lt;RowPageLocation value="ByCalculation"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;SelectAll state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Exit state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;RowPageLocation value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ First</li> <li>■ Last</li> <li>■ Previous</li> <li>■ Next</li> <li>■ ByCalculation</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>&lt;NoInteract&gt; and &lt;Calculation&gt; nodes are present when &lt;RowPageLocation value&gt; attribute is "ByCalculation".</p> <p>&lt;Exit&gt; element is only present when &lt;RowPageLocation value&gt; is "Next" or "Previous".</p> <p>&lt;Exit state&gt; indicates whether script execution should be terminated if there is no next/previous row in the portal (i.e. if the current row is the last/first one in the portal).</p>
Navigation	Go To Field	<pre>&lt;Step id="17" name="Go to Field" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;Field name="FieldName" id="2" table="TableName"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<p>&lt;SelectAll state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Navigation	Go To Next Field	<pre>&lt;Step id="4" name="Go to Next Field" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Navigation	Go To Previous Field	<pre>&lt;Step id="5" name="Go to Previous Field" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Navigation	Enter Browse Mode	<pre>&lt;Step id="55" name="Enter Browse Mode" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Pause state="True"/&gt; &lt;/Step&gt;</pre>	<p>&lt;Pause state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Navigation	Enter Find Mode	<pre>&lt;Step id="22" name="Enter Find Mode" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Pause state="True"/&gt; {See Perform Find for remaining XML} &lt;/Step&gt;</pre>	<p>&lt;Pause state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>{See <a href="#">Perform Find</a> for remaining details.}</p>	{See <a href="#">Perform Find</a> .}
Navigation	Enter Preview Mode	<pre>&lt;Step id="41" name="Enter Preview Mode" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Pause state="True"/&gt; &lt;/Step&gt;</pre>	<p>&lt;Pause state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Found Sets	Sort Records	<pre>&lt;Step id="39" name="Sort Records" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="False"/&gt; &lt;Restore state="True"/&gt; &lt;SortList&gt; &lt;Sort type="Descending"&gt; &lt;PrimaryField&gt; &lt;Field name="f1" id="1" table="test123"/&gt; &lt;/PrimaryField&gt; &lt;/Sort&gt; &lt;Sort type="Ascending"&gt; &lt;PrimaryField&gt; &lt;Field name="f4" id="2" table="test123"/&gt; &lt;/PrimaryField&gt; &lt;SummaryField&gt; &lt;Field name="summary" id="3" table="test123"/&gt; &lt;/SummaryField&gt; &lt;OverrideLanguage language="Japanese"/&gt; &lt;/Sort&gt; &lt;Sort type="Custom"&gt; &lt;PrimaryField&gt; &lt;Field name="f5" id="4" table="test123"/&gt; &lt;/PrimaryField&gt; &lt;ValueList name="New Value List" id="1"/&gt; &lt;/Sort&gt; &lt;/SortList&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Restore state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Sort type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Ascending</li> <li>■ Descending</li> <li>■ Custom</li> </ul> <p>&lt;OverrideLanguage language&gt; can be:</p> <ul style="list-style-type: none"> <li>■ English</li> <li>■ Japanese.</li> </ul>	<p>&lt;ValueList&gt; node exists if &lt;Sort type&gt; is Custom.</p> <p>&lt;SummaryField&gt; and &lt;OverrideLanguage&gt; sub-nodes are optional.</p>
Found Sets	Unsort Records	<pre>&lt;Step id="21" name="Unsort Records" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Found Sets	Show All Records	<pre>&lt;Step id="23" name="Show All Records" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Found Sets	Show Omitted Only	<pre>&lt;Step id="27" name="Show Omitted Only" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Found Sets	Omit Record	<pre>&lt;Step id="25" name="Omit Record" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Found Sets	Omit Multiple Records	<pre>&lt;Step id="26" name="Omit Multiple Records" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt;   &lt;![CDATA[CalcString]]&gt; &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Found Sets	Perform Find	<pre>&lt;Step id="28" name="Perform Find" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Restore state="True"/&gt; &lt;Query table="test123"&gt;   &lt;RequestRow operation="Include"&gt;     &lt;Criteria&gt;       &lt;Text&gt;&amp;gt; 11&lt;/Text&gt;       &lt;Field name="f2" id="2" repetition="2" table="test123"/&gt;     &lt;/Criteria&gt;     &lt;Criteria&gt;       &lt;Text&gt;&amp;lt; 23&lt;/Text&gt;       &lt;Field name="f3" id="2" repetition="2" table="test123"/&gt;     &lt;/Criteria&gt;   &lt;/RequestRow&gt;   &lt;RequestRow operation="Exclude"&gt;     &lt;Criteria&gt;       &lt;Text&gt;&amp;gt; &amp;quot;wow&amp;quot;&lt;/Text&gt;       &lt;Field name="f3" id="2" repetition="2" table="test123"/&gt;     &lt;/Criteria&gt;     &lt;Criteria&gt;       &lt;Text&gt;&amp;gt; test&lt;/Text&gt;       &lt;Field name="f4" id="2" repetition="2" table="test123"/&gt;     &lt;/Criteria&gt;     &lt;Criteria&gt;       &lt;Text&gt;&amp;gt; &amp;quot;hello there &lt;/Text&gt;       &lt;Field name="f5" id="2" repetition="2" table="test123"/&gt;     &lt;/Criteria&gt;   &lt;/RequestRow&gt; &lt;/Query&gt; &lt;/Step&gt;</pre>	<p>&lt;Restore state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;RequestRow operation&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Include</li> <li>■ Exclude</li> </ul>	<p>Query node can have 1 or more RequestRow sub-nodes.</p> <p>Each RequestRow node can in turn have 1 or more Criteria sub-nodes.</p> <p>&lt;Text&gt; contains the actual criteria itself that will be applied to &lt;Field&gt;.</p> <p>&lt;Field repetition&gt; is only output if &gt; 1.</p>
Found Sets	Modify Last Find	<pre>&lt;Step id="24" name="Modify Last Find" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Sort/Find/Print	Print Setup	<pre>&lt;Step id="42" name="Print Setup" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="False"/&gt;   &lt;Restore state="true"&gt;   &lt;PageFormat PaperTop="0" PaperLeft="0"     PaperBottom="3300" PaperRight="2550"     PrintableWidth="3150" PrintableHeight="2250"     ScaleFactor="1" PageOrientation="Portrait"&gt;   &lt;PlatformData PlatformType={PlatformType}&gt;     &lt;![CDATA[{Flattened Windows/Mac specific settings}]]&gt;   &lt;/PlatformData&gt;   &lt;/Format&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Restore state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;PageFormat PageOrientation&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Portrait</li> <li>■ ReversePortrait</li> <li>■ Landscape</li> <li>■ ReverseLandscape</li> </ul>	—
Sort/Find/Print	Print	<pre>&lt;Step id="43" name="Print" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;Restore state="true"&gt;   &lt;PrintSettings PrintType="BrowsedRecords" NumCopies="1"   collated="True" AllPages="False" FromPage="1" ToPage="5"   PrintToFile="False" PageNumberingOffset="1"&gt;   &lt;PlatformData PlatformType={PlatformType}&gt;     &lt;![CDATA[{Flattened Windows/Mac specific settings}]]&gt;   &lt;/PlatformData&gt;   &lt;/PrintSettings&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Restore state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;PrintSettings PrintType&gt; can be:</p> <ul style="list-style-type: none"> <li>■ BrowsedRecords</li> <li>■ CurrentRecord</li> <li>■ BlankAsFormatted</li> <li>■ BlankBoxed</li> <li>■ BlankUnderscore</li> </ul> <p>&lt;PrintSettings collated&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;PrintSettings AllPages&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;PrintSettings PrintToFile&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>See <a href="#">Print Setup</a> for details on PageFormat element.</p>	—
Editing	Undo	<pre>&lt;Step id="45" name="Undo" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Editing	Cut	<pre> &lt;Step id="46" name="Cut" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;Field name="f3" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;SelectAll state&gt; can be:   ■ True   ■ False </pre>	—
Editing	Copy	<pre> &lt;Step id="47" name="Copy" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;Field name="f3" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;SelectAll state&gt; can be:   ■ True   ■ False </pre>	—
Editing	Paste	<pre> &lt;Step id="48" name="Paste" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoStyle state="True"/&gt;   &lt;SelectAll state="True"/&gt;   &lt;LinkAvail state="True"/&gt;   &lt;Field name="f3" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;NoStyle state&gt; can be:   ■ True   ■ False &lt;SelectAll state&gt; can be:   ■ True   ■ False &lt;LinkAvail state&gt; can be:   ■ True   ■ False </pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Editing	Clear	<pre>&lt;Step id="49" name="Clear" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Field name="f4" id="2" table="test"/&gt; &lt;Repetition&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA["Value"]]&gt;   &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;SelectAll state&gt; can be: ■ True ■ False</pre>	—
Editing	Select All	<pre>&lt;Step id="50" name="Select All" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Fields	Set Field	<pre>&lt;Step id="76" name="Set Field" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Field name="f1" id="2" table="test"/&gt; &lt;Repetition&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA["Value"]]&gt;   &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;Chunk type&gt; can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—
Fields	Insert Text	<pre>&lt;Step id="61" name="Insert Text" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Text&gt;&amp;quot;Text to insert&amp;quot;&lt;/Text&gt; &lt;Field name="f1" id="2" table="test"/&gt; &lt;Repetition&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA["Value"]]&gt;   &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;SelectAll state&gt; can be: ■ True ■ False</pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Fields	Insert Calculated Result	<pre> &lt;Step id="77" name="Insert Calculated Result" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;Field name="f1" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;SelectAll state&gt; can be:   ■ True   ■ False  &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	—
Fields	Insert from Index	<pre> &lt;Step id="11" name="Insert from Index" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;Field name="f2" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;SelectAll state&gt; can be:   ■ True   ■ False </pre>	—
Fields	Insert from Last Visited	<pre> &lt;Step id="12" name="Insert from Last Visited" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SelectAll state="True"/&gt;   &lt;Field name="f3" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	<pre> &lt;SelectAll state&gt; can be:   ■ True   ■ False </pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Fields	Insert Current Date	<pre>&lt;Step id="13" name="Insert Current Date" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Field name="f3" id="2" table="test"/&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;SelectAll state&gt; can be: ■ True ■ False</pre>	—
Fields	Insert Current Time	<pre>&lt;Step id="14" name="Insert Current Time" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Field name="f4" id="2" table="test"/&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;SelectAll state&gt; can be: ■ True ■ False</pre>	—
Fields	Insert Current User Name	<pre>&lt;Step id="60" name="Insert Current User Name" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Field name="f4" id="2" table="test"/&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<pre>&lt;SelectAll state&gt; can be: ■ True ■ False</pre>	—
Fields	Insert Picture	<pre>&lt;Step id="56" name="Insert Picture" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;UniversalPathList type="Reference"&gt; {PathList}&lt;/UniversalPathList&gt; &lt;/Step&gt;</pre>	<pre>&lt;UniversalPathList type&gt; can be: ■ Reference ■ Embedded</pre>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XML Grammar	XML Values	XML Description
Fields	Insert QuickTime	<pre>&lt;Step id="59" name="Insert QuickTime" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;UniversalPathList&gt;   {PathList}&lt;/UniversalPathList&gt; &lt;/Step&gt;</pre>	—	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Fields	Insert Object	<pre>&lt;Step id="78" name="Insert Object" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Set state="True"/&gt;   &lt;UniversalPathList&gt;   {PathList}&lt;/UniversalPathList&gt;   &lt;OLEData&gt;   &lt;![CDATA[{OLE data}]]&gt;   &lt;/OLEData&gt;   &lt;ObjectType&gt;{Object Type}&lt;/ObjectType&gt; &lt;/Step&gt;</pre>	<Set state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	<UniversalPath> is only present if the inserted object is of type "Create from File". <p><b>Note</b> Although it makes sense for the &lt;UniversalPathList&gt; reference attribute to be supported for this script step, the setting of the 'Link' checkbox in the Insert Object dialog is actually stored in the OLEData element's CDATA, despite the fact that the file chosen via this dialog is not (since it is stored in the &lt;UniversalPathList&gt; element).</p>
Fields	Update Link	<pre>&lt;Step id="96" name="Update Link" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Field name="f2" id="2" table="test"/&gt;   &lt;Repetition&gt;   &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;   &lt;![CDATA["Value"]]&gt;   &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;</pre>	—	—
Records	New Record/Request	<pre>&lt;Step id="7" name="New Record/Request" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Records	Duplicate Record/Request	<pre>&lt;Step id="8" name="Duplicate Record/Request" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Records	Delete Record/Request	<pre>&lt;Step id="9" name="Delete Record/Request" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt; &lt;/Step&gt;</pre>	<NoInteract state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Records	Delete Portal/Row	<pre>&lt;Step id="104" name="Delete Portal Row" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be: ■ True ■ False</pre>	—
Records	Revert Record/Request	<pre>&lt;Step id="51" name="Revert Record/Request" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be: ■ True ■ False</pre>	—
Records	Commit Records/Requests	<pre>&lt;Step id="75" name="Commit Records/Requests" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;Option state="true"/&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be: ■ True ■ False  &lt;Option state&gt; can be: ■ True ■ False</pre>	—
Records	Copy Record	<pre>&lt;Step id="101" name="Copy Record/Request" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Records	Copy All Records	<pre>&lt;Step id="98" name="Copy All Records/Requests" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Records	Delete All Records	<pre>&lt;Step id="10" name="Delete All Records" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be: ■ True ■ False</pre>	—
Fields	Replace Field Contents	<pre>&lt;Step id="91" name="Replace Field Contents" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;With value="None"&gt; &lt;/Step&gt;  &lt;Step id="91" name="Replace Field Contents" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;With value="CurrentContents"&gt; &lt;Field name="f3" id="2" table="test"/&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre> <p><i>(continued on next page)</i></p>	<pre>&lt;NoInteract state&gt; can be: ■ True ■ False  &lt;With value&gt; can be: ■ None ■ CurrentContents ■ SerialNumbers ■ Calculation  &lt;SerialNumbers UseEntryOptions&gt; can be: ■ True ■ False  &lt;SerialNumbers UpdateEntryOptions&gt; can be: ■ True ■ False  &lt;Chunk type&gt; can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	<p>&lt;With value&gt; reflects the user's choice of what to replace the specified fields contents with. &lt;SerialNumbers&gt; is present when &lt;With value&gt; is "SerialNumbers". &lt;SerialNumbers InitialValue&gt; and &lt;SerialNumbers Increment&gt; can optionally be used to control serial number generation. &lt;Calculation&gt; is present when &lt;With value&gt; is "Calculation".</p>

Area	Name	XML Grammar	XML Values	XML Description
Fields	Replace Field Contents <i>(continued from previous page)</i>	<pre> &lt;Step id="91" name="Replace Field Contents" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;With value="SerialNumbers"&gt;     &lt;SerialNumbers UseEntryOptions="False"       InitialValue="0" Increment="1"       UpdateEntryOptions="False"/&gt;     &lt;Field name="f3" id="2" table="test"/&gt;     &lt;Repetition&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Value"]&gt;       &lt;/Calculation&gt;     &lt;/Repetition&gt;   &lt;/Step&gt;  &lt;Step id="91" name="Replace Field Contents" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;With value="Calculation"&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[Abs ( f3 )]]&gt;     &lt;/Calculation&gt;     &lt;Field name="f3" id="2" table="test"/&gt;     &lt;Repetition&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Value"]&gt;       &lt;/Calculation&gt;     &lt;/Repetition&gt;   &lt;/Step&gt;                     </pre>		
Fields	Relookup Field Contents	<pre> &lt;Step id="40" name="Relookup Field Contents" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;Field name="f2" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;                     </pre>	<NoInteract state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—







Area	Name	XML Grammar	XML Values	XML Description
Records	Import Records <i>(continued from previous page)</i>			For a request to import into a new table: <ul style="list-style-type: none"><li>■ &lt;Table&gt; element is absent</li><li>■ {FieldName} for each &lt;Field&gt; element child of &lt;TargetFields&gt; element is index of field from data source to import into that target field. Each target field's actual name will be determined by the name of the corresponding source field in the same position (as previously established in the 'Import Mapping' dialog) when the script step is eventually performed.</li></ul>



Area	Name	XML Grammar	XML Values	XML Description
Records	Export Records <i>(continued from previous page)</i>	<pre>&lt;ExportEntries&gt;   &lt;ExportEntry&gt;     &lt;Field name={FieldName} id="2" repetition="2" table={Table}/&gt;     &lt;Field name={FieldName} id="2" repetition="2" table={Table}/&gt;   &lt;/ExportEntry&gt;   ... &lt;/ExportEntries&gt;  &lt;SummaryFields&gt;   &lt;Field name={FieldName} id="2" repetition="2" table={Table}/&gt;   &lt;Field name={FieldName} id="2" repetition="2" table={Table}/&gt;   ... &lt;/SummaryFields&gt; &lt;/Step&gt;</pre>		<p>&lt;ExportEntry&gt; node normally contains only one &lt;Field&gt; sub-node (identifying a field to be exported) but will contain a second one if the first is a summary field and the user requested that exported records be grouped by some field, in which case the second field is a "summarize by" field.</p> <p>&lt;Field repetition&gt; is only output if &gt; 1</p>
Windows	Freeze Window	<pre>&lt;Step id="79" name="Freeze Window" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Windows	Refresh Window	<pre>&lt;Step id="80" name="Refresh Window" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Windows	Scroll Window	<pre>&lt;Step id="81" name="Scroll Window" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ScrollOperation value="Home"/&gt; &lt;/Step&gt;</pre>	<p>&lt;ScrollOperation&gt; value can be:</p> <ul style="list-style-type: none"> <li>■ Home</li> <li>■ End</li> <li>■ PageUp</li> <li>■ PageDown</li> <li>■ ToSelection</li> </ul>	—
Windows	Adjust Window	<pre>&lt;Step id="31" name="Adjust Window" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;WindowState value="Maximize"/&gt; &lt;/Step&gt;</pre>	<p>&lt;WindowState value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ ResizeToFit</li> <li>■ Maximize</li> <li>■ Minimize</li> <li>■ Restore</li> <li>■ Hide</li> </ul>	—
Windows	Show/Hide Status Area	<pre>&lt;Step id="29" name="Show/Hide Status Area" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Lock state="True"/&gt;   &lt;ShowHide value="Hide"/&gt; &lt;/Step&gt;</pre>	<p>&lt;Lock state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Showed value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Show</li> <li>■ Hide</li> <li>■ Toggle</li> </ul>	—
Windows	Show/Hide Text Ruler	<pre>&lt;Step id="92" name="Show/Hide Text Ruler" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ShowHide value="Hide"/&gt; &lt;/Step&gt;</pre>	<p>&lt;ShowHide value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Show</li> <li>■ Hide</li> <li>■ Toggle</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Windows	Set Zoom Level	<pre>&lt;Step id="97" name="Set Zoom Level" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Lock state="True"/&gt;   &lt;Zoom value="75"/&gt; &lt;/Step&gt;</pre>	<p>&lt;Lock state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Zoom value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ 25</li> <li>■ 50</li> <li>■ 75</li> <li>■ 100</li> <li>■ 150</li> <li>■ 200</li> <li>■ 300</li> <li>■ 400</li> <li>■ ZoomIn</li> <li>■ ZoomOut</li> </ul>	—
Windows	View As	<pre>&lt;Step id="30" name="View As" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;View value="Form"/&gt; &lt;/Step&gt;</pre>	<p>&lt;View value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Form</li> <li>■ List</li> <li>■ Table</li> <li>■ Cycle</li> </ul>	—
Files	New File	<pre>&lt;Step id="82" name="New File" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Files	Open File	<pre>&lt;Step id="33" name="Open File" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Option state="True"/&gt;   &lt;FileReference name={name} id="1"&gt;     &lt;UniversalPathList&gt;     {PathList}&lt;/UniversalPathList&gt;   &lt;/FileReference&gt; &lt;/Step&gt;</pre>	<p>&lt;Option state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Files	Close File	<pre>&lt;Step id="34" name="Close File" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;FileReference name={name} id="1"&gt;     &lt;UniversalPathList&gt;     {PathList}&lt;/UniversalPathList&gt;   &lt;/FileReference&gt; &lt;/Step&gt;</pre>	—	<p>If no &lt;FileReference&gt; node is present, the current file is closed.</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>

Area	Name	XML Grammar	XML Values	XML Description
Account	Change password	<pre>&lt;Step id="83" name="Change Password" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;OldPassword&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA[{CalcString}]]&gt; &lt;/Calculation&gt; &lt;/OldPassword&gt;  &lt;NewPassword&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA[{CalcString}]]&gt; &lt;/Calculation&gt; &lt;/NewPassword&gt; &lt;/Step&gt;</pre>	<p>&lt;StepText&gt; contains the full detailed description of this script step along with its options. The contents of this node are the same as the ones that will get printed part of script definition print.</p> <p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Files	Set Multi-User	<pre>&lt;Step id="84" name="Set Multi-User" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;MultiUser value="True"/&gt; &lt;/Step&gt;</pre>	<p>&lt;MultiUser value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> <li>■ OnHidden</li> </ul>	—
Files	Set Use System Formats	<pre>&lt;Step id="94" name="Set Use System Formats" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Set state="True"/&gt; &lt;/Step&gt;</pre>	<p>&lt;Set state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Files	Save a Copy As	<pre>&lt;Step id="37" name="Save a Copy as" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;AutoOpen state="True"/&gt; &lt;CreateEmail state="True"/&gt; &lt;SaveAsType value="Copy"/&gt; &lt;UniversalPathList&gt; {PathList}&lt;/UniversalPathList&gt; &lt;/Step&gt;</pre>	<p>&lt;SaveAsType value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Copy</li> <li>■ CompactedCopy</li> <li>■ Clone</li> </ul> <p>&lt;AutoOpen state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;CreateEmail state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Files	Recover File	<pre>&lt;Step id="95" name="Recover File" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;NoInteract state="True"/&gt; &lt;UniversalPathList&gt; {PathList}&lt;/UniversalPathList&gt; &lt;/Step&gt;</pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XML Grammar	XML Values	XML Description
Spelling	Check Selection	<pre>&lt;Step id="18" name="Check Selection" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;SelectAll state="True"/&gt; &lt;Field name="f2" id="2" table="test"/&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<SelectAll state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	—
Spelling	Check Record	<pre>&lt;Step id="19" name="Check Record" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Spelling	Check Found Set	<pre>&lt;Step id="20" name="Check Found Set" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Spelling	Correct Word	<pre>&lt;Step id="106" name="Correct Word" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Spelling	Spelling Options	<pre>&lt;Step id="107" name="Spelling Options" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Spelling	Select Dictionaries	<pre>&lt;Step id="108" name="Select Dictionaries" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Spelling	Edit User Dictionary	<pre>&lt;Step id="109" name="Edit User Dictionary" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Open Menu Item	Open Preferences	<pre>&lt;Step id="105" name="Open Preferences" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Open Menu Item	Open File Options	<pre>&lt;Step id="114" name="Open File Options" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Open Menu Item	Open Define Database	<pre>&lt;Step id="38" name="Open Define Database" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Open Menu Item	Open Define Value Lists	<Step id="112" name="Open Define Value Lists" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Help	<Step id="32" name="Open Help" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Remote	<Step id="118" name="Open Remote" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open ScriptMaker	<Step id="88" name="Open ScriptMaker" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Sharing	<Step id="113" name="Open Sharing" enable="True"> <StepText>Script step text</StepText> </Step>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Miscellaneous	Show Custom Dialog	<pre> &lt;Step id="87" name="Show Custom Dialog" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Title&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[{CalcString}]]&gt;     &lt;/Calculation&gt;   &lt;/Title&gt;    &lt;Message&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[{CalcString}]]&gt;     &lt;/Calculation&gt;   &lt;/Message&gt;    &lt;ButtonCaptions&gt;     &lt;ButtonCaption&gt;Ok&lt;/ButtonCaption&gt;     &lt;ButtonCaption&gt;Cancel&lt;/ButtonCaption&gt;     &lt;ButtonCaption&gt;{TextString}&lt;/ButtonCaption&gt;   &lt;/ButtonCaptions&gt;    &lt;InputFields&gt;     &lt;InputField CommitState="True" UsePasswordCharacter="True"&gt;       &lt;Field name={FieldName} id="2" repetition="2" table={Table}/&gt;       &lt;Label&gt;         &lt;DisplayCalculation&gt;           &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;           &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;         &lt;/DisplayCalculation&gt;         &lt;Calculation&gt;           &lt;![CDATA[{CalcString}]]&gt;         &lt;/Calculation&gt;       &lt;/Label&gt;     &lt;InputField&gt;       ...     &lt;/InputField&gt;     ...   &lt;/InputFields&gt; &lt;/Step&gt; </pre>	<pre> &lt;InputField CommitState&gt; can be:   ■ True   ■ False &lt;InputField UsePasswordCharacter&gt; can be:   ■ True   ■ False &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	<pre> &lt;Field repetition&gt; is only output if &gt; 1 </pre>
Miscellaneous	Allow Toolbars	<pre> &lt;Step id="115" name="Allow Toolbars" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Set state="True"/&gt; &lt;/Step&gt; </pre>	<pre> &lt;Set state&gt; can be:   ■ True   ■ False </pre>	
Miscellaneous	Beep	<pre> &lt;Step id="93" name="Beep" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt; </pre>	—	

Area	Name	XML Grammar	XML Values	XML Description
Miscellaneous	Speak (Mac)	<pre>&lt;Step id="66" name="Speak" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;SpeechOptions VoiceCreator={voice creator}   VoiceId={voice id}   VoiceName={voice name}   WaitForCompletion="True"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<pre>&lt;Speech WaitForCompletion&gt; can be:   ■ True   ■ False &lt;SpeechOptions VoiceCreator&gt; is a four character string. &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef</pre>	<pre>&lt;SpeechOptions VoiceName&gt; is only generated on the Mac and contains redundant information that only serves to make DDR reports (in particular HTML ones) more readable.</pre>
Miscellaneous	Dial Phone	<pre>&lt;Step id="65" name="Dial Phone" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;UseDialPreferences value="True"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[613-667-5030]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be:   ■ True   ■ False &lt;UseDialPreferences value&gt; can be:   ■ True   ■ False &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef</pre>	—
Miscellaneous	Open URL	<pre>&lt;Step id="111" name="Open URL" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA["http://www.filemaker.com"]]&gt;   &lt;/Calculation&gt; &lt;/Step&gt;</pre>	<pre>&lt;NoInteract state&gt; can be:   ■ True   ■ False &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef</pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Miscellaneous	Send Mail	<pre> &lt;Step id="63" name="Send Mail" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;Attachment&gt;     &lt;UniversalPathList&gt;       {PathList}&lt;/UniversalPathList&gt;     &lt;/Attachment&gt;     &lt;MultipleEmails state="True"/&gt;      &lt;To UseFoundSet="True"&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA[CalcString]]&gt;       &lt;/Calculation&gt;     &lt;/To&gt;      &lt;Cc UseFoundSet="True"&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA[CalcString]]&gt;       &lt;/Calculation&gt;     &lt;/Cc&gt;      &lt;Bcc UseFoundSet="True"&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA[&lt;Step id="63" name="Send Mail"&gt;       &lt;/Calculation&gt;     &lt;/Bcc&gt;      &lt;Subject&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Subject"]]&gt;       &lt;/Calculation&gt;     &lt;/Subject&gt;      &lt;Message&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Message"]]&gt;       &lt;/Calculation&gt;     &lt;/Message&gt;   &lt;/Step&gt; </pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;MultipleEmails state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;To/Cc/Bcc UseFoundSet&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>

Area	Name	XML Grammar	XML Values	XML Description
Fields	Set Next Serial Value	<pre>&lt;Step id="116" name="Set Next Serial Value" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[12]]&gt;   &lt;/Calculation&gt;   &lt;Field name="f3" id="2" table="test"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Miscellaneous	Send Event (Mac)	See <a href="#">SendEvent (Win)</a> .	See <a href="#">Send Event (Win)</a> .	—
Miscellaneous	Perform AppleScript (Mac)	<pre>&lt;Step id="67" name="Perform AppleScript" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ContentType value="Calculation"&gt;   &lt;CompiledScript&gt;     &lt;![CDATA[{compiled apple script data}]]&gt;   &lt;/CompiledScript&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA["this is a calculated string"]]&gt;   &lt;/Calculation&gt;   &lt;Text&gt;This is a string literal&lt;/Text&gt; &lt;/Step&gt;</pre>	<p>&lt;ContentType value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Calculation</li> <li>■ Text</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>&lt;Calculation&gt; is present when &lt;ContentType value&gt; is "Calculation" and &lt;Text&gt; is present when it is "Text".</p>

Area	Name	XML Grammar	XML Values	XML Description
Miscellaneous	Send DDE Execute (Win)	<pre> &lt;Step id="64" name="Send DDE Execute" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ContentType value="Calculation"&gt;     &lt;UniversalPathList&gt;       {PathList}&lt;/UniversalPathList&gt;      &lt;ServiceName&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Word"]]&gt;       &lt;/Calculation&gt;     &lt;/ServiceName&gt;      &lt;Topic&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["TopicText"]]&gt;       &lt;/Calculation&gt;     &lt;/Topic&gt;      &lt;Command&gt;       &lt;DisplayCalculation&gt;         &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;         &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;       &lt;/DisplayCalculation&gt;       &lt;Calculation&gt;         &lt;![CDATA["Delete All"]]&gt;       &lt;/Calculation&gt;     &lt;/Command&gt;   &lt;/Step&gt; </pre>	<p>&lt;ContentType value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ File</li> <li>■ Calculation</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>&lt;UniversalPathList&gt; is present when &lt;ContentType value&gt; is "File" and &lt;Topic&gt; is present when it is "Calculation".</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
Miscellaneous	Execute SQL	<pre> &lt;Step id="117" name="Execute SQL" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   {See ODBC data source profile element in Import Records step} &lt;/Step&gt; </pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>{See ODBC data source profile element in <a href="#">Import Records</a> step}</p>	<p>{See ODBC data source profile element in <a href="#">Import Records</a> step}</p>

Area	Name	XML Grammar	XML Values	XML Description
Miscellaneous	Send Event (Win)	<pre>&lt;Step id="57" name="Send event" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ContentType value="Calculation"&gt;     &lt;UniversalPathList&gt;       {PathList}&lt;/UniversalPathList&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;{13}&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;   &lt;/Calculation&gt;{CalcString}&lt;/Calculation&gt;   &lt;Text&gt;{TextString}&lt;/Text&gt;   &lt;Event class={class} id={id}     TargetName={TargetName}     TargetType={TargetType}     BringTargetToForeground="True"     WaitForCompletion="True"     CopyResultToClipboard="False"/&gt; &lt;/Step&gt;</pre>	<p>&lt;ContentType value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ File</li> <li>■ Calculation</li> <li>■ Text</li> </ul> <p>&lt;Event class&gt;, &lt;Event id&gt;, and &lt;Event TargetType&gt; are four character Apple Event related strings.</p> <p>&lt;Event BringTargetToForeground&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Event WaitForCompletion&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Event CopyResultToClipboard&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<p>&lt;UniversalPathList&gt; is present when &lt;ContentType value&gt; is "File", &lt;Calculation&gt; is present when it is "Calculation", and &lt;Text&gt; is present when it is "Text".</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
Miscellaneous	Comment	<pre>&lt;Step id="89" name="Comment" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Text&gt;This is a comment&lt;/Text&gt; &lt;/Step&gt;</pre>	—	—
Miscellaneous	Flush Cache to Disk	<pre>&lt;Step id="102" name="Flush Cache to Disk"   enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Miscellaneous	Exit Application	<pre>&lt;Step id="44" name="Exit Application"   enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Open Menu Item	Open Find/Replace	<pre>&lt;Step id="129" name="Open Find/Replace"   enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—

Area	Name	XML Grammar	XML Values	XML Description
Editing	Perform Find/Replace	<pre> &lt;Step id="128" name="Perform Find/Replace" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;    &lt;FindReplaceOperation     type="FindNext" direction="Forward"     MatchCase="False"     MatchWholeWords="False"     AcrossOptions="All" WithinOptions="All"/&gt;    &lt;FindCalc&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{CalcString}]&gt;     &lt;/Calculation&gt;   &lt;/FindCalc&gt;    &lt;ReplaceCalc&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{CalcString}]&gt;     &lt;/Calculation&gt;   &lt;/ReplaceCalc&gt; &lt;/Step&gt; </pre>	<pre> &lt;NoInteract state&gt; can be:   ■ True   ■ False  &lt;FindReplaceOperation type&gt; can be:   ■ FindNext   ■ ReplaceAndFind   ■ Replace   ■ ReplaceAll  &lt;FindReplaceOperation direction&gt; can be:   ■ Forward   ■ Backward   ■ All  &lt;FindReplaceOperation MatchCase&gt; can be:   ■ True   ■ False  &lt;FindReplaceOperation MatchWholeWords&gt; can be:   ■ True   ■ False  &lt;FindReplaceOperation AcrossOptions&gt; can be:   ■ All   ■ Current  &lt;FindReplaceOperation WithinOptions&gt; can be:   ■ All   ■ Current  &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Windows	New Window	<pre> &lt;Step id="122" name="New Window" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;LimitToWindowsOfCurrentFile state="True"/&gt;   &lt;Name&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["WindowName"]]&gt;     &lt;/Calculation&gt;   &lt;/Name&gt;   &lt;Height&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;      &lt;Calculation&gt;       &lt;![CDATA[200]]&gt;     &lt;/Calculation&gt;   &lt;/Height&gt;   &lt;Width&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;      &lt;Calculation&gt;       &lt;![CDATA[400]]&gt;     &lt;/Calculation&gt;   &lt;/Width&gt;   &lt;DistanceFromTop&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;      &lt;Calculation&gt;       &lt;![CDATA[100]]&gt;     &lt;/Calculation&gt;   &lt;/DistanceFromTop&gt;   &lt;DistanceFromLeft&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;      &lt;Calculation&gt;       &lt;![CDATA[125]]&gt;     &lt;/Calculation&gt;   &lt;/DistanceFromLeft&gt; &lt;/Step&gt; </pre>	<pre> &lt;LimitToWindowsOfCurrentFile state&gt; can be:   ■ True   ■ False  &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Windows	Select Window	<pre>&lt;Step id="123" name="Select Window" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Window value="ByName"/&gt; &lt;LimitToWindowsOfCurrentFile state="True"/&gt; &lt;Name&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Customer Name"]&gt; &lt;/Calculation&gt; &lt;/Name&gt; &lt;/Step&gt;</pre>	<p>&lt;Window value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Current</li> <li>■ ByName</li> </ul> <p>&lt;LimitToWindowsOfCurrentFile state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<Name> is present when <Window value> is "ByName".
Windows	Move/Resize Window	<pre>&lt;Step id="119" name="Move/Resize Window" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Window value="Current"/&gt; &lt;LimitToWindowsOfCurrentFile state="True"/&gt; {See New Window for remaining XML} &lt;/Step&gt;</pre>	<p>&lt;Window value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Current</li> <li>■ ByName</li> </ul> <p>&lt;LimitToWindowsOfCurrentFile state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>{See New Window for remaining details.}</p>	{See <a href="#">New Window</a> .}
Windows	Set Window Title	<pre>&lt;Step id="124" name="Set Window Title" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Window value="ByName"/&gt; &lt;LimitToWindowsOfCurrentFile state="True"/&gt; &lt;Name&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Customer Name"]&gt; &lt;/Calculation&gt; &lt;/Name&gt; &lt;NewName&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["New Title"]&gt; &lt;/Calculation&gt; &lt;/NewName&gt; &lt;/Step&gt;</pre>	<p>&lt;Window value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Current</li> <li>■ ByName</li> </ul> <p>&lt;LimitToWindowsOfCurrentFile state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<Name> is present when <Window value> is "ByName".
Windows	Arrange All Windows	<pre>&lt;Step id="120" name="Arrange All Windows" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;WindowArrangement value="TileHorizontally"/&gt; &lt;/Step&gt;</pre>	<p>&lt;WindowArrangement Value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ TileHorizontally</li> <li>■ TileVertically</li> <li>■ Cascade</li> <li>■ BringAllToFront (Mac specific)</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Windows	Close Window	<pre>&lt;Step id="121" name="Close Window" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;Window value="ByName"/&gt; &lt;LimitToWindowsOfCurrentFile state="True"/&gt; &lt;Name&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Customer Name"]&gt; &lt;/Calculation&gt; &lt;/Name&gt; &lt;/Step&gt;</pre>	<p>&lt;Window value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Current</li> <li>■ ByName</li> </ul> <p>&lt;LimitToWindowsOfCurrentFile state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	<Name> is present when <Window value> is "ByName".
Open Menu Item	Open Define File References	<pre>&lt;Step id="140" name="Open Define File References" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Records	Open Record/Request	<pre>&lt;Step id="133" name="Open Record/Request" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;/Step&gt;</pre>	—	—
Control	Else If	<pre>&lt;Step name="Else If" id="125" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt;CalcString&lt;/Calculation&gt; &lt;/Step&gt;</pre>	<p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Fields	Insert File	<pre>&lt;Step id="131" name="Insert File" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;UniversalPathList type="Reference"&gt; {PathList}&lt;/UniversalPathList&gt; &lt;Field name={FieldName} id="2" table={Table}&gt; &lt;Repetition&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA["Value"]&gt; &lt;/Calculation&gt; &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<p>&lt;UniversalPathList type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Reference</li> <li>■ Embedded</li> </ul>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XML Grammar	XML Values	XML Description
Fields	Export Field Contents	<pre>&lt;Step id="132" name="Export Field Contents" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;AutoOpen state="True"/&gt;   &lt;CreateEmail state="True"/&gt;   &lt;UniversalPathList&gt; {PathList}&lt;/UniversalPathList&gt;   &lt;Field name="FieldName" id="2" table="TableName"/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<p>&lt;AutoOpen state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;CreateEmail state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	<p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
Editing	Set Selection	<pre>&lt;Step id="130" name="Set Selection" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;StartPosition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}&gt;     &lt;/Calculation&gt;   &lt;/StartPosition&gt;    &lt;EndPosition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}&gt;     &lt;/Calculation&gt;   &lt;/EndPosition&gt;    &lt;Field name={FieldName} id="2" table={Table}/&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA["Value"]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt;</pre>	<p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Found Sets	Constrain Found Set	<pre>&lt;Step id="126" name="Constrain Found Set" enable="True"&gt;   {See Perform Find} &lt;/Step&gt;</pre>	{See <a href="#">Perform Find</a> }	{See <a href="#">Perform Find</a> }

Area	Name	XML Grammar	XML Values	XML Description
Found Sets	Extend Found Set	<pre>&lt;Step id="127" name="Extend Found Set" enable="True"&gt; {See Perform Find} &lt;/Step&gt;</pre>	{See <a href="#">Perform Find</a> }	{See <a href="#">Perform Find</a> }
Account	Add Account	<pre>&lt;ScriptStep id="134" name="Add Account" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;ChgPwdOnNextLogin value="True"&gt;  &lt;AccountName&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA[{CalcString}]]&gt; &lt;/Calculation&gt; &lt;/AccountName&gt;  &lt;Password&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA[{CalcString}]]&gt; &lt;/Calculation&gt; &lt;/Password&gt;  &lt;PrivilegeSet name={Privilege Set Name} id="1"/&gt; &lt;/Step&gt;</pre>	<Chunk type> can be: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Account	Delete Account	<pre>&lt;ScriptStep id="135" name="Delete Account" enable="True"&gt; &lt;StepText&gt;Script step text&lt;/StepText&gt; &lt;AccountName&gt; &lt;DisplayCalculation&gt; &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt; &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt; &lt;/DisplayCalculation&gt; &lt;Calculation&gt; &lt;![CDATA[{CalcString}]]&gt; &lt;/Calculation&gt; &lt;/AccountName&gt; &lt;/Step&gt;</pre>	<Chunk type> can be: <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—

Area	Name	XML Grammar	XML Values	XML Description
Account	Reset Account Password	<pre> &lt;ScriptStep id="136" name="Reset Account Password" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ChgPwdOnNextLogin value="True"&gt;    &lt;AccountName&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}]&gt;     &lt;/Calculation&gt;   &lt;/AccountName&gt;    &lt;Password&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}]&gt;     &lt;/Calculation&gt;   &lt;/Password&gt; &lt;/Step&gt; </pre>	<pre> &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	—
Account	Enable Account	<pre> &lt;ScriptStep id="137" name="Enable Account" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;AccountOperation value="Activate"/&gt;   &lt;AccountName&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}]&gt;     &lt;/Calculation&gt;   &lt;/AccountName&gt; &lt;/Step&gt; </pre>	<pre> &lt;AccountOperation value&gt; can be:   ■ Activate   ■ Deactivate &lt;Chunk type&gt; can be:   ■ NoRef   ■ FunctionRef   ■ FieldRef   ■ CustomFunctionRef </pre>	—

Area	Name	XML Grammar	XML Values	XML Description
Account	Re-Login	<pre> &lt;ScriptStep id="138" name="Re-Login" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;AccountName&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}]&gt;     &lt;/Calculation&gt;   &lt;/AccountName&gt;    &lt;Password&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA{{CalcString}}]&gt;     &lt;/Calculation&gt;   &lt;/Password&gt; &lt;/Step&gt; </pre>	<p>&lt;NoInteract state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Chunk type&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NoRef</li> <li>■ FunctionRef</li> <li>■ FieldRef</li> <li>■ CustomFunctionRef</li> </ul>	—
Files	Convert File	<pre> &lt;Step id="139" name="Convert File" enable="True"&gt; {See Import Records, except for folder data source options, which Convert File does not have.} &lt;/Step&gt; </pre>	{See <a href="#">Import Records</a> , except for folder data source options, which Convert File does not have.}	—

Area	Name	XML Grammar	XML Values	XML Description
Records	Save Records as PDF	<pre> &lt;Step id="144" name="Save Records as PDF" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;Restore state="True"/&gt;   &lt;AutoOpen state="True"/&gt;   &lt;CreateEmail state="True"/&gt;to   &lt;UniversalPathList&gt;   {PathList}&lt;/UniversalPathList&gt;    &lt;PDFOptions source="RecordsBeingBrowsed" appearance="AsFormatted"&gt;   &lt;Document compatibility="Acrobat5AndLater"&gt;   &lt;Title&gt;     &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;     &lt;/Title&gt;      &lt;Subject&gt;     &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;     &lt;/Subject&gt;      &lt;Author&gt;     &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;     &lt;/Author &gt;      &lt;KeyWords&gt;     &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;     &lt;/KeyWords &gt; </pre>	<pre> &lt;NoInteract state&gt; can be:   ■ True   ■ False  &lt;Restore state&gt; can be:   ■ True   ■ False  &lt;AutoOpen state&gt; can be:   ■ True   ■ False  &lt;CreateEmail state&gt; can be:   ■ True   ■ False  &lt;PDFOptions source&gt; can be:   ■ RecordsBeingBrowsed   ■ CurrentRecord   ■ BlankRecord  &lt;PDFOptions appearance&gt; can be:   ■ AsFormatted   ■ WithBoxes   ■ WithUnderlines  &lt;Document compatibility&gt; can be:   ■ Acrobat5AndLater   ■ Acrobat6AndLater </pre>	<pre> &lt;PDFOptions appearance&gt; is only generated if &lt;PDFOptions source&gt; is "BlankRecord". </pre>

Area	Name	XML Grammar	XML Values	XML Description
Records	Save Records as PDF	<pre> &lt;Pages&gt;   &lt;NumberFrom&gt;   &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;   &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;/NumberFrom&gt;    &lt;AllPages state="true"&gt;    &lt;PageRange&gt;   &lt;From&gt;   &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;   &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;/From&gt;    &lt;To&gt;   &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;   &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;/To&gt;   &lt;/PageRange&gt;   &lt;/Pages&gt; &lt;/Document&gt;  &lt;Security requireOpenPassword="True" requireControlPassword="True"   controlPrinting="HighResolution" controlEditing="AnyExceptExtracting"   enableCopying="True" allowScreenReader="True"&gt;   &lt;OpenPassword&gt;   &lt;DisplayCalculation&gt;   &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;   &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;   &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt;   &lt;/OpenPassword&gt; </pre>	<p>&lt;AllPages state&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Security requireOpenPassword&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Security requireControlPassword&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Security controlPrinting&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NotPermitted</li> <li>■ LowResolution</li> <li>■ HighResolution</li> </ul> <p>&lt;Security controlEditing&gt; can be:</p> <ul style="list-style-type: none"> <li>■ NotPermitted</li> <li>■ InsertingDeletingRotatingPages</li> <li>■ FillingInForms</li> <li>■ Commenting</li> <li>■ AnyExceptExtractingPages</li> </ul> <p>&lt;Security enableCopying&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul> <p>&lt;Security allowScreenReader&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	

Area	Name	XML Grammar	XML Values	XML Description
Records	Save Records as PDF	<pre> &lt;ControlPassword&gt;   &lt;DisplayCalculation&gt;     &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;     &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;   &lt;/DisplayCalculation&gt;   &lt;Calculation&gt;     &lt;![CDATA[CalcString]]&gt;   &lt;/Calculation&gt; &lt;/ControlPassword&gt; &lt;/Security&gt;  &lt;View show="PageOnly" pageLayout="SinglePage" magnification="25"/&gt; &lt;/PDFOptions&gt; &lt;/Step&gt; </pre>	<pre> &lt;View show&gt; can be:   ■ PageOnly   ■ BookmarksPanelAndPage   ■ PagesPanelAndPage  &lt;View pageLayout&gt; can be:   ■ Default   ■ SinglePage   ■ Continuous   ■ Facing   ■ ContinuousFacing  &lt;View magnification&gt; can be:   ■ Default   ■ FitPage   ■ FitWidth   ■ FitVisible   ■ 25   ■ 50   ■ 75   ■ 100   ■ 125   ■ 150   ■ 200   ■ 400   ■ 800 </pre>	

Area	Name	XML Grammar	XML Values	XML Description
Records	Save Records as Excel	<pre> &lt;Step id="143" name="Save Records as Excel" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;NoInteract state="True"/&gt;   &lt;Restore state="True"/&gt;   &lt;AutoOpen state="True"/&gt;   &lt;CreateEmail state="True"/&gt;   &lt;UniversalPathList&gt; {PathList}&lt;/UniversalPathList&gt;   &lt;SaveType value="BrowsedRecords"/&gt;   &lt;UseFieldNames state="True"/&gt;    &lt;WorkSheet&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/WorkSheet&gt;    &lt;Title&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Title&gt;    &lt;Subject&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Subject&gt;    &lt;Author&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Author &gt; &lt;/Step&gt; </pre>	<pre> &lt;NoInteract state&gt; can be:   ■ True   ■ False &lt;Restore state&gt; can be:   ■ True   ■ False &lt;AutoOpen state&gt; can be:   ■ True   ■ False &lt;CreateEmail state&gt; can be:   ■ True   ■ False &lt;SaveType value&gt; can be:   ■ BrowsedRecords   ■ CurrentRecord &lt;UseFieldNames state&gt; can be:   ■ True   ■ False </pre>	

Area	Name	XML Grammar	XML Values	XML Description
Control	Set Variable	<pre> &lt;Step id="141" name="Set Variable" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Name&gt;{Variable name}&lt;/Name&gt;   &lt;Value&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Value&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>	—	—
Miscellaneous	Install Menu Set	<pre> &lt;Step id="142" name="Install Menu Set" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;UseAsFileDefault state="True"/&gt;   &lt;CustomMenuSet id="3" name={Menu set name}/&gt; &lt;/Step&gt; </pre>	<UseAsFileDefault state> can be: <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	
Control	Go to Object	<pre> &lt;Step id="145" name="Go to Object" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;ObjectName&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/ObjectName&gt;   &lt;Repetition&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/Repetition&gt; &lt;/Step&gt; </pre>		

Area	Name	XML Grammar	XML Values	XML Description
Control	Set Web Viewer	<pre> &lt;Step id="146" name="Set Web Viewer" enable="True"&gt;   &lt;StepText&gt;Script step text&lt;/StepText&gt;   &lt;Action value="Reset"/&gt;   &lt;ObjectName&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/ObjectName&gt;   &lt;URL custom="True"&gt;     &lt;DisplayCalculation&gt;       &lt;Chunk type="FunctionRef"&gt;Abs&lt;/Chunk&gt;       &lt;Chunk type="NoRef"&gt;(13)&lt;/Chunk&gt;     &lt;/DisplayCalculation&gt;     &lt;Calculation&gt;       &lt;![CDATA[CalcString]]&gt;     &lt;/Calculation&gt;   &lt;/URL&gt; &lt;/Step&gt; </pre>	<p>&lt;Action value&gt; can be:</p> <ul style="list-style-type: none"> <li>■ Reset</li> <li>■ Reload</li> <li>■ GoForward</li> <li>■ GoBack</li> <li>■ GoToURL</li> </ul> <p>&lt;URL custom&gt; can be:</p> <ul style="list-style-type: none"> <li>■ True</li> <li>■ False</li> </ul>	<p>&lt;URL&gt; element is present when &lt;Action value&gt; is "GoToURL".</p>